

Description

SPC6-0.5 is an automatic battery charger with a standard AC connector, best suited for home medical equipment, wheelchairs, scooters, mobility and other applications. The charger works best with batteries rated between 2 Amp and 3.5 Amp. SPC6-0.5 comes with 1 year warranty and is overseas ready.



General Characteristics

Over Load Protection	<0.75A
Short Circuit Protection	Enable
Reversed Polarity Protection	Enable
Operating Temperature	0°C(32°F) to 40°C(104°F)
Storage Temperature	-30°C(-22°F) to 85°C(185°F)
Operating Relative Humidity	8% to 90%
Storage Relative Humidity	5% to 95%

Applications

- Sealed Lead Acid Battery

Input




AC Input Voltage Range	90Vac to 264Vac
AC Input Voltage Rating	100Vac to 240Vac
AC Input Frequency	50/60Hz
AC Input Current	0.1A@115Vac / 0.07A@230Vac
AC Input Power	5.6W (max.)
AC Input Static State Current	20mA (max.)

Output


Output Voltage Range	5Vdc to 7.5Vdc
Output Current	0.5A@6Vdc (±10%)
Output Power	3.8W (max.)
Bulk Charge Current Rating	0.5A
Bulk Charge Voltage Rating	7.35Vdc (±0.15Vdc)
Float Charge Voltage Rating	6.85Vdc (±0.15Vdc)
Light Switching Current	100mA (±25mA)

Dimensions (mm/inch)

AC Terminal Type	Length	Width	Height	Weight
Alligator Clips	68 / 2.66	52 / 2.06	40 / 1.59	0.20kg / 0.45lb



Charger Characteristics

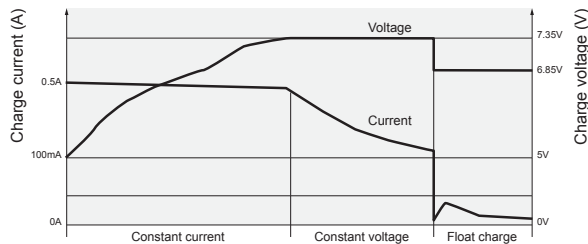

Indicator Status

- Green LED on - Empty Load or Float Charge
- Red LED on - Bulk Charge

Contact Information

SigmasTek
7651 W 100th Place
Bridgeview, IL 60455, USA

T: (888) 988-8290
www.sigmastek.com
order@sigmastek.com