

Specifications

Nominal Voltage	12V		
Nominal Capacity (10HR)	3.5AH		
Dimension	Length	114mm (4.49 inches)	
	Width	71mm (2.80 inches)	
	Height	86mm (3.39 inches)	
	Total Height (with Terminal)	86mm (3.39 inches)	
	Approximate Weight	1.44 kg (3.17 lbs)	
CCA	50		
Polarity	-/+		
Battery Type	Valve Regulated Lead-Acid Battery, AGM Design		
Terminal Type	NB		
Acid Volume	0.22 Liter		
Charge Current	0.35 Amps	-20°C (-4°F)~50°C (122°F)	
	Discharge:	-20°C (-4°F)~50°C (122°F)	
	Charge:	-20°C (-4°F)~40°C (104°F)	
Operating Temp. Range	Storage:		
Nominal Operating Temp. Range	25±3°C (77±5°F)		
Self Discharge	SigmasTek ST series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is recommended. For higher temperatures the time interval will be shorter.		



Applications




- ATV
- Jet Ski
- Motorcycle
- Snowmobile
- Lawn & Garden




Dimensions

NB Terminal


Unit: mm (inches)

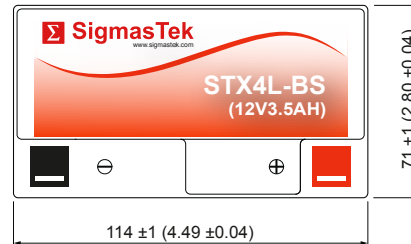

Self Discharge Characteristics

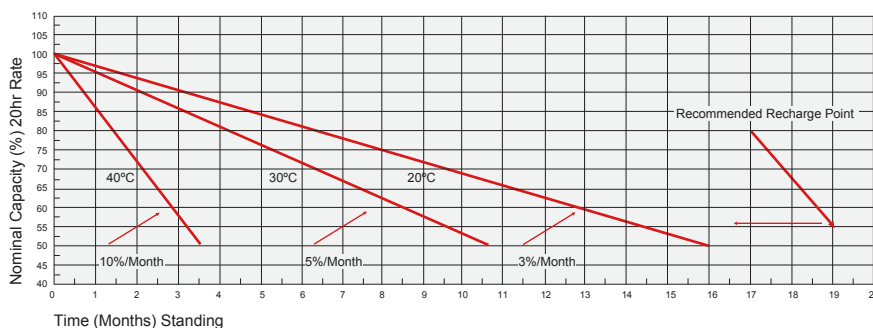

Discharge Characteristics

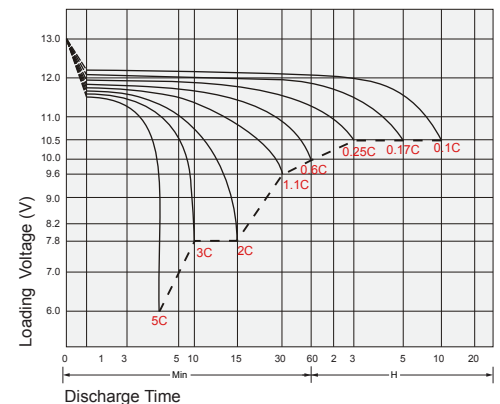

Contact Information

SigmasTek
7651 W 100th Place
Bridgeview, IL 60455, USA

T: (888) 98808290
www.sigmastek.com
order@sigmastek.com