

Specifications

Nominal Voltage	12V	
Nominal Capacity (10HR)	8.6AH	
Dimension	Length	150mm (5.91 inches)
	Width	87mm (3.43 inches)
	Height	93mm (3.66 inches)
	Total Height (with Terminal)	93mm (3.66 inches)
Approximate Weight	2.72 kg (5.99 lbs)	
CCA	190	
Polarity	+/-	
Battery Type	Valve Regulated Lead-Acid Battery, AGM Design	
Terminal Type	NB	
Acid Volume	0.36 Liter	
Charge Current	0.80 Amps	
Operating Temp. Range	Discharge:	-20°C (-4°F)~50°C (122°F)
	Charge:	-20°C (-4°F)~50°C (122°F)
	Storage:	-20°C (-4°F)~40°C (104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Self Discharge	SigmasTek ST series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is recommended. For higher temperatures the time interval will be shorter.	



Applications





- ATV
- Jet Ski
- Motorcycle
- Snowmobile
- Lawn & Garden




Dimensions

NB Terminal


Unit: mm (inches)

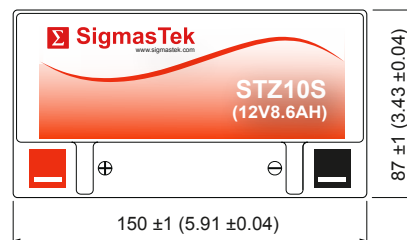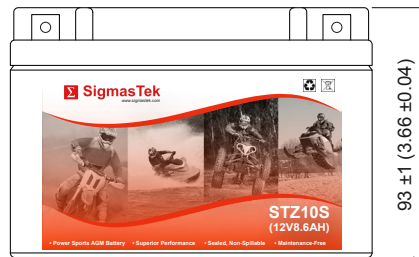

Self Discharge Characteristics

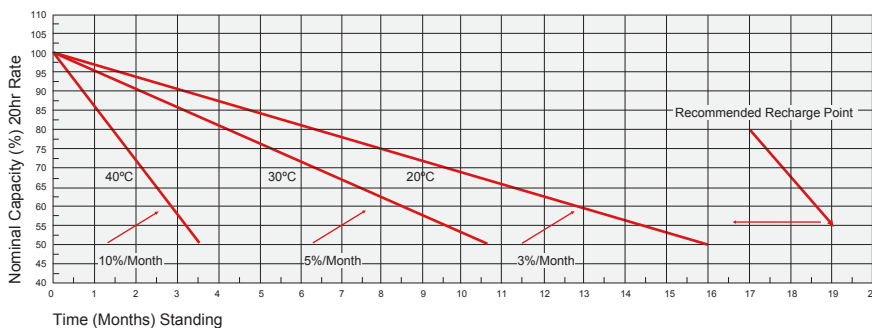

Discharge Characteristics

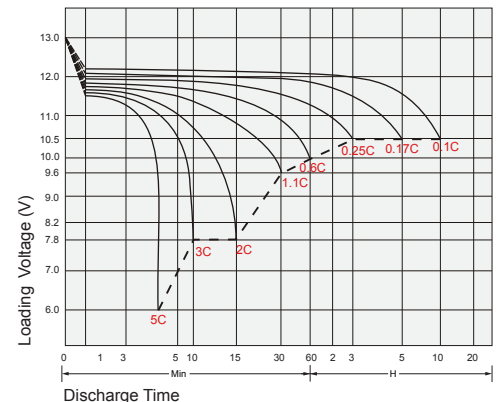

Contact Information

SigmasTek
7651 W 100th Place
Bridgeview, IL 60455, USA

T: (888) 988-8290
www.sigmastek.com
order@sigmastek.com