

Specifications

Nominal Voltage	6V	
Nominal Capacity (20HR)	8AH	
Dimension	Length	134mm (5.28 inches)
	Width	49mm (1.94 inches)
	Height	101mm (3.98 inches)
	Total Height (with Terminal)	101mm (3.98 inches)
	Approximate Weight	1.42 kg (3.13 lbs)
Battery Type	Valve Regulated Lead-Acid Battery, AGM Design	
Terminal Type	T2	
Rated Capacity	8.08AH	(20hr, 1.75V/cell, 25°C/77°F)
	7.64AH	(10hr, 1.75V/cell, 25°C/77°F)
	6.80AH	(5hr, 1.75V/cell, 25°C/77°F)
	6.75AH	(3hr, 1.60V/cell, 25°C/77°F)
	5.02AH	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	120A	
Internal Resistance	11mΩ	
Operating Temp. Range	Discharge:	-20°C (-4°F)~50°C (122°F)
	Charge:	-20°C (-4°F)~50°C (122°F)
	Storage:	-20°C (-4°F)~40°C (104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Container Material	ABS (Option: 94-HB & 94-V0 flame retardant case)	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	SigmasTek SPM series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is recommended. For higher temperatures the time interval will be shorter.	



Applications

- Uninterruptible Power Supply (UPS)
- Electric wheelchairs, scooters, bikes
- Electronic apparatus and equipment
- Alarm and security systems
- Emergency first responder equipment
- Emergency lighting
- Medical devices
- Electric carts
- Telecom equipment
- Switchgear
- Solar power systems



Constant Current Discharge (Amperes Per Battery) at 25°C (77°F)

F.V. (V/cell) \ Discharge Time	5min	10min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	30.9	21.0	15.5	9.20	5.02	2.92	2.25	1.48	0.969	0.804	0.419
1.65V	28.0	19.3	14.5	8.71	4.98	2.80	2.19	1.43	0.960	0.795	0.417
1.70V	25.4	17.9	13.7	8.26	4.86	2.76	2.10	1.39	0.945	0.779	0.411
1.75V	23.1	16.4	12.8	7.94	4.71	2.69	2.04	1.36	0.932	0.764	0.404
1.80V	20.4	14.9	11.7	7.64	4.51	2.60	2.00	1.32	0.916	0.744	0.400
1.85V	15.2	11.7	9.69	6.48	4.02	2.38	1.86	1.23	0.864	0.722	0.396



Constant Power Discharge (Watts Per Cell) at 25°C (77°F)

F.V. (V/cell) \ Discharge Time	5min	10min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	51.2	35.7	27.2	16.8	9.45	5.54	4.30	2.85	1.89	1.58	0.825
1.65V	47.5	33.6	25.8	16.0	9.40	5.34	4.20	2.77	1.88	1.57	0.822
1.70V	43.7	31.4	24.5	15.3	9.26	5.29	4.04	2.71	1.85	1.54	0.811
1.75V	40.8	29.5	23.3	14.8	9.00	5.18	3.94	2.64	1.83	1.51	0.798
1.80V	37.0	27.3	21.6	14.3	8.65	5.01	3.88	2.59	1.80	1.47	0.791
1.85V	27.9	21.6	18.1	12.3	7.76	4.62	3.63	2.42	1.71	1.43	0.784


Dimensions

T2 Terminal


Unit: mm (inches)

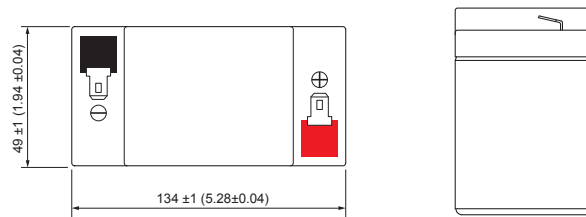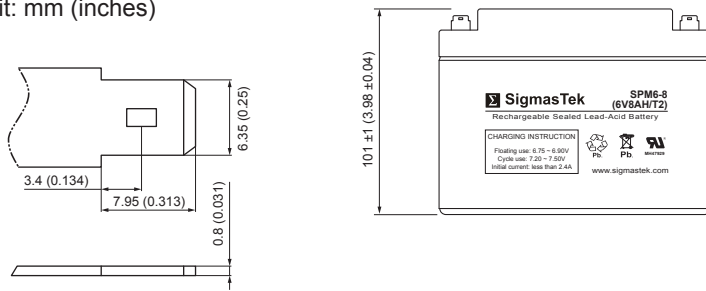


Cycle Service Life

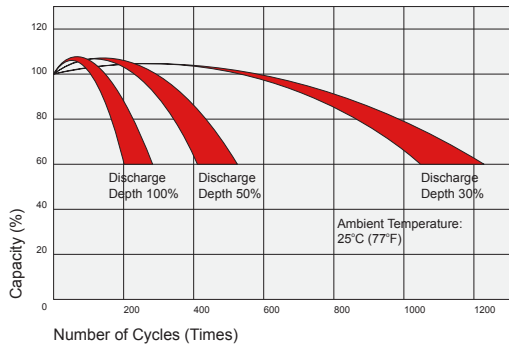


Self Discharge Characteristics

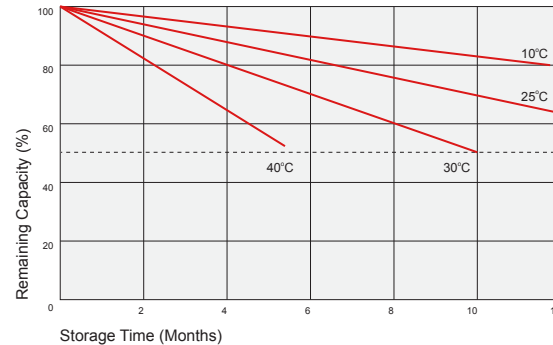


Discharge Characteristics

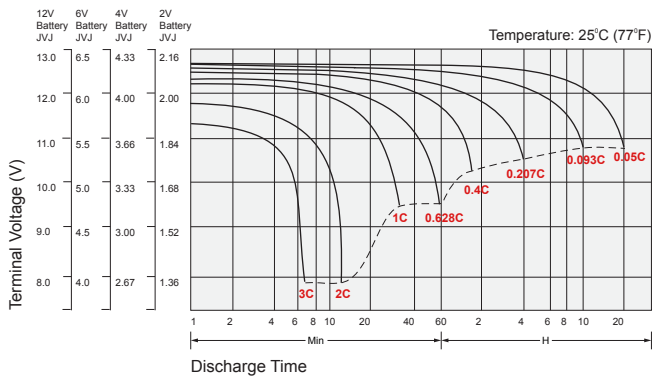


Float Charging Characteristics

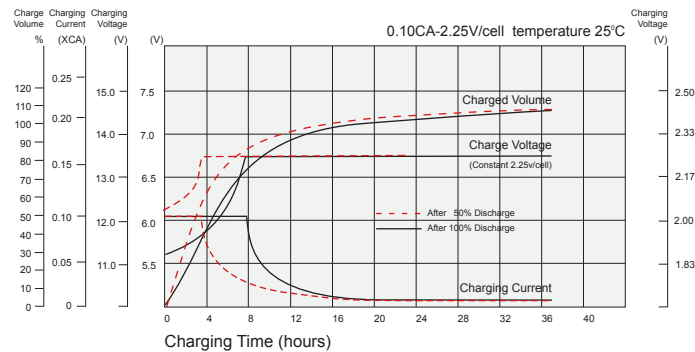

Temperature Effects in Relation to Battery Capacity

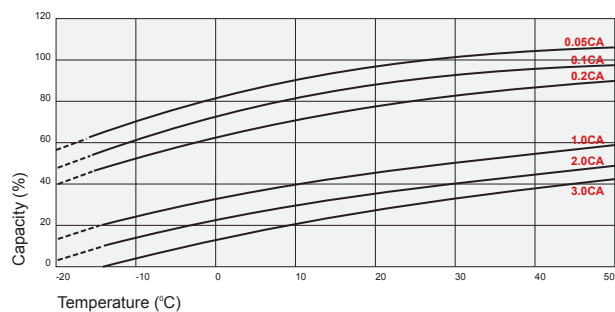

Temperature Effects on Long Term Float Life

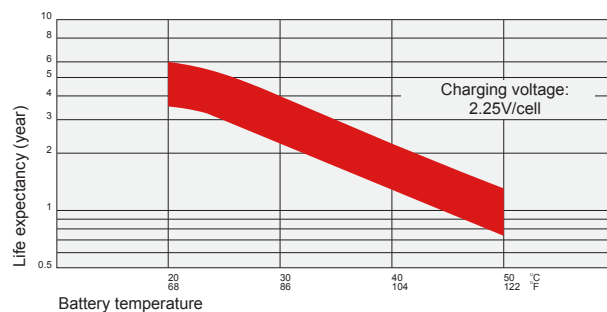

Contact Information

SigmasTek
7651 W 100th Place
Bridgeview, IL 60455, USA

T: (888) 988-8290
www.sigmastek.com
order@bridgeviewpower.com